

Technical Commercial Data Sheet

Spinatrice - Spinocianfrinatrice MAC 200 S - MAC 210 SC




- **Universal pneumatic pincer - pincer**
- **Automatic plug loader with cyclic feed**
- **Retractable pneumatic vice with double button control**
- **Automatic adjustment of the clamp stop position according to the profile width**




- The retractable pneumatic vice ensures easy access when loading and unloading the profile

• **Spinning principle**

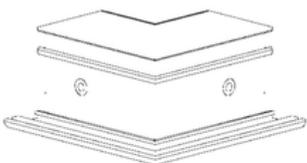

• **Spinocyaniding principle**

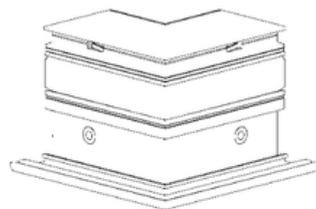


Accessories on request

- Profile support shim kit and chamfering punches for machining other series
- Additional plug chargers
- Chamfering head kit (for MAC 200 S only)

Mandatory accessories

MAC 200 S

Profile support shim kit

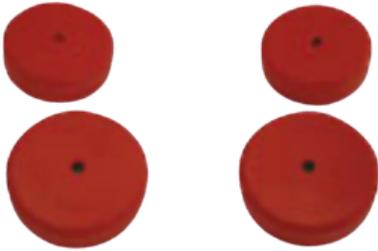

MAC 210 SC

Profile support shim kit and chamfering punches



Technical features

- Machining thrust on each dowel head: 37300 N (3800 Kg)
- Operating pressure: 6 –7 bar
- Adjustable dowel height: Min 10 mm - Max 35 mm
- Distance between dowel and adjustable corner: Min 39 mm (MAC 200 S)
Max 73 mm (MAC 200 S)
Min 47,5 mm (MAC 210 SC)
Max 52 mm (MAC 210 SC)
- Working capacity (profile chamber width): Min 12 mm - Max 70 mm
- Retractable pneumatic vice, adjustable in height, with double button control and system for automatic adjustment of the stop position according to the width of the profile
- Automatic plug loader with cyclic feed
- Simultaneous adjustment of the dowel distance from the angle of the two heads
- Height-adjustable profile supports
- Machine dimensions: 2300 mm (a) x 1350 mm (b) x 1100 mm (c) (MAC 200 S)
2300 mm (a) x 1500 mm (b) x 1100 mm (c) (MAC 210 SC)
- Machine weight: 318 kg (MAC 200 S)
334 Kg (MAC 210 SC)