



Technical Commercial Data Sheet  
**Portable cutting machine with reflector TC 300**


- Manual head rotation adjustment – 45° / 0° / + 45 and intermediate degrees
- Head tiltable to 45° left side for making inclined cuts
- Upper trimming table with adjustable stop device

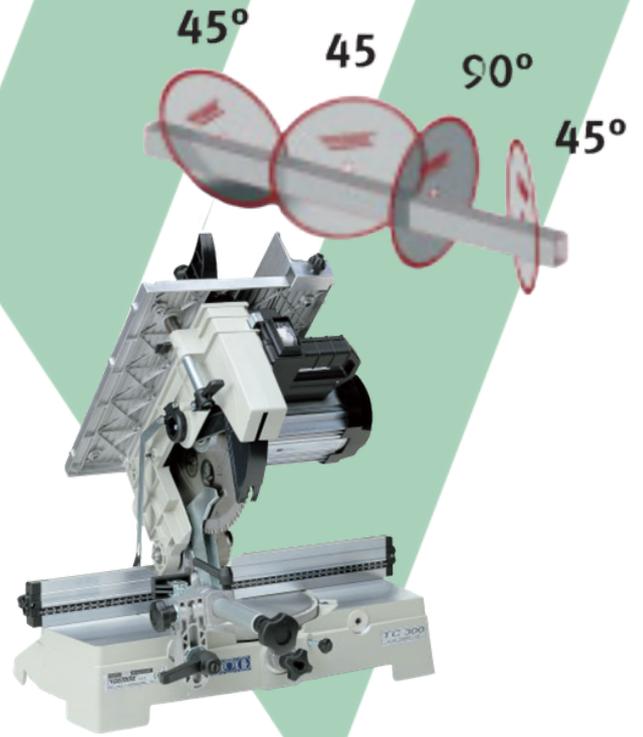


**Cutting diagrams**

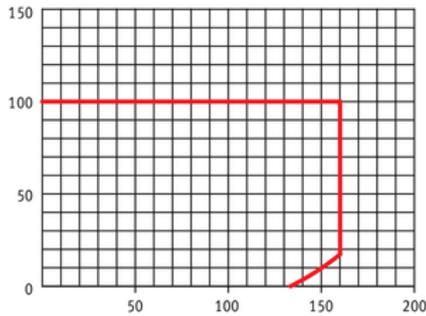

**90° Length**

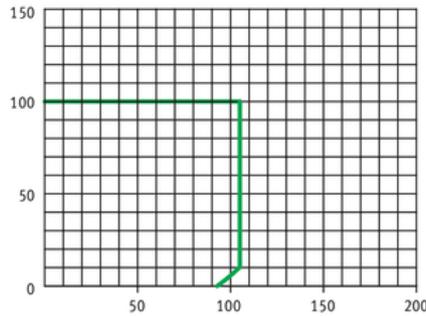

**Blade rotated 45°**

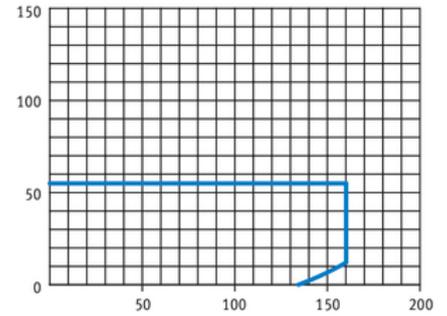

**45° inclined blade**



## Technical Commercial Data Sheet

### **Portable cutting machine with reflector TC 300**

#### **Technical features**

- Single-phase motor 1.4 kW - 230V - 50Hz
- N° di giri: 2890 min<sup>-1</sup>
- Long diameter: 300 mm
- Blade shaft diameter: 30 mm
- Manual head rotation adjustment – 45° / 0° / + 45 and intermediate degrees
- Manual head tilt adjustment 0° / 45° left side
- Trimming table dimensions: 310 mm (a) x 395 mm (b)
- Useful cutting height with respect to the trimming table: 50 mm
- Machine dimensions: 530 mm (a) x 510 mm (b) x 480 mm (c)
- Machine weight: 28 kg

#### **Standard equipment**

- Hard metal blade
- No. 1 manual horizontal vice
- No. 1 striking rod
- Installation, use and maintenance manual in the following languages:
- Service keys

#### **Accessories on request**

- Additional manual horizontal vice